speb 7®
ADHESIVE
BORN FOR BONDING

ADHESIVE FOR UPHOLSTERY INDUSTRY

speb 7®
ADHESIVE

SPEB-7 Multipurpose Adhesive

Application Industries

- Upholstery (CHAIR / SOFA Manufacturing)
- Bus Body (Vinyl to Plywood / Hat-Rack / other areas)
- PVC Flooring & Carpet Flooring
- Automobile Industry
- Ducting & Insulation
- Refrigeration Industry
- Switchgear Industry
- Leather Works
- Domestic Application
- Handicraft Industry

Directions For Use

- Keep the surface to be bonded clean & dry.
- Remove any dirt, grease etc.
- Apply the adhesive on both surfaces equally and allow drying for 5-10 mins.
- Now join both surfaces and press well for about 4-8 hours to get a strong bond.
- Care should be taken to avoid touching of air during joining.

Product Highlights

- Multi-purpose adhesive.
- Ideal viscosity gives superior coverage.
- Excellent bonding strength.
- Does not contain benzene that reduces the risk of cancer.

Pack Size

- 50 ml, 100 ml, 200 ml, 500 ml, 1 ltr, 2 ltr, 4 ltr, 5 ltr, 30 ltr



Caution:

- It is Highly Inflammable so keep away from heat & flame.
- Ensure children don't reach the product.

speb 7 ADHESIVE

SPEB-7 BOND-1

Application Industries

- Upholstery, Foam &Rexine
- Furniture, Flooring (Carpet/Vinyl/PVC)
- Other Industrial Applications

Directions For Use

- Stir well before use.
- Apply Bond No.1 Adhesive on one or both the surfaces evenly & allow it to dry for 2–5 mins.
- Bond No.1 Adhesive is fast bond adhesive.
- Press the surface well after application to get the perfect bond.
- When not in use keep it in tub with lid tightly closed.

Product Highlights

- BrushableAdhesive with good productivity & superior coverage.
- Very Fast Bonding & Good Initial Grab.
- Excellent Bonding Strength.
- Heat Resistance.
- Very Low Smell.
- Bond No.1 has High Initial Grab as well as high open time.

Pack Size

- 500 ml, 1 Ltr, 5 Ltr, 30 Ltr



Caution:

- It's Highly Inflammable, so keep away from heat & flame.
- Keep away from the reach of children.
- Do not use empty this to store any food items.

Application Industries

- Mattress Manufacturers
- Sofa & Chair Manufacturers
- Automotive Interior Trim &
- Acoustic Manufacturers

Directions For Use

- Keep the surface to be bonded clean & dry.
- Remove any dirt, grease etc.
- Apply the adhesive on both surfaces evenly and allow drying for 5-10 mins.
- Now join both surfaces and press well for about 6-8 hours to get a strong bond.
- Care should be taken to avoid trapping of air during joining.

Product Highlights

- Sprayable adhesive ensures productivity and superior coverage.
- Excellent Bond Strength on difficult curved areas like- Hand Rest & Backrest. Keeps the foam bonded to wood/ foam.
- High heat resistant.
- Good initial grab and fast bonding.
- Does not contain benzene that reduces the risk of cancer.

Pack Size

- 4.5 Ltr,10 Ltr,15 Ltr & 30 Ltr

Caution : It is Highly Inflammable so keep away from heat & flame. Ensure children don't reach the product.

speb 7 ADHESIVE

SPEB 7 G7 SUPERFAST SPRAYGRADE ADHESIVE



Application Industries

- Mattress Manufacturers
- Sofa & Chair Manufacturers
- Automotive Interior Trim &
- Acoustic Manufacturers

Directions For Use

- Keep the surface to be bonded clean & dry.
- Remove any dirt, grease etc.
- Apply the adhesive on both surfaces evenly and allow drying for 5-10 mins.
- Now join both surfaces and press well for about 6-8 hours to get a strong bond.
- Care should be taken to avoid trapping of air during joining.

Product Highlights

- Get better productivity and superior coverage.
- Excellent Bond Strength on difficult curved areas like- Hand Rest & Back rest. Keeps the foam bonded to wood/ foam.
- High heat resistant.
- Good initial grab and fast bonding.
- Does not contain benzene that reduces the risk of cancer.

Pack Size

- 8.5 Kg, 9.5 Kg, 13 Kg & 15 kg

Caution : It is Highly Inflammable so keep away from heat & flame.

Ensure children don't reach the product.

speb 7 ADHESIVE

SPEB-7 G1 SUPERFAST SPRAYGRADE ADHESIVE



Application Industries

- Upholstery Manufacturers
- Upholstery (Chair / Sofa Manufacturers)
- Upholstery (Carpet / Vinyl / PVC)
- Other Industrial Applications

Directions For Use

- Keep the surface to be bonded clean and dry
- Remove any dirt, grease etc.
- Apply adhesive on both surfaces evenly and press well for bonding.
- Now join the the both surfaces and press well for about 6-8 hours to get a strong bond.
- Care should be taken to avoid trapping of air during joining.

Product Highlights

- Sprayable adhesive with good productivity and coverage.
- Excellent bond strength.
- Good resistance to heat & moisture
- High heat resistant.
- Does not contain benzene that reduces the risk of cancer.

Pack Size

- 5 Ltr, 30 Ltr

Caution:

- It's Highly Inflammable, so keep away from heat & flame.
- Keep away from the reach of children.
- Do not use empty this to store any food items.

speb 7® ADHESIVE

SPEB-7
SPRAYGRADE ADHESIVE



speb 7®
ADHESIVE
BORN FOR BONDING

ADHESIVE FOR FURNITURE INDUSTRY

speb 7®
ADHESIVE

AQUA-7 WATERPROOF ADHESIVE

Application Industries

- SPEB-7 WOOD WORKING ADHESIVE – AQUA-7 D3 is a specially formulated adhesive used in WOODWORKING INDUSTRY.
- It is a WATERPROOF synthetic resin adhesive that protects furniture from de-bonding even when exposed to water.
- It can be applied for bonding of Wood, Plywood, Laminates, Veneers, Particle Board, MDF, Block Board/Hard Board to each other or to any two materials where at least one of them is porous.

Directions For Use

- The adhesive can be applied by brush, roller, spreader or fingers.
- Clean both the surfaces to be bonded.
- Apply a thin coat of AQUA-7 D3 adhesive on single or both the surfaces as per requirement.
- Press both the surfaces and keep them under pressure till the adhesives dry completely.
- Wipe out the excess adhesive pressed outside with a WET CLOTH.

Product Highlights

- Resistant to Water.
- Resistant to Heat (Upto 80 deg.C).
- Higher Initial Tack & Fast Drying.
- Thinner Bond Line.
- Better Flow.
- SUPER PERFECT EVERLASTING BOND.

Pack Size

- 800 gms, 5 Kg, 20 Kg

The description, detail, and data contained herein are presented for your guidance only. Because there are many factors beyond our control which may affect processing or application, it is the user's responsibility to determine the suitability of the product for his intended use. No statement or information contained herein is to be considered as a warranty.

Caution:

- Keep away from the reach of children.
- Do not use empty this to store any food items.



Application Industries

- SPEB-7 WOOD WORKING ADHESIVE is a synthetic resin adhesive. It strongly binds wood, laminate, plywood, MDF, Veneers and all types of boards and cork.
- This adhesive can be applied for bonding Wood, Plywood, Laminates, Veneers, Particle Board, MDF, and Block Board/Hard Board to each other or to any two materials where at least one of them is porous.

Product Highlights

- Excellent Bond Strength
- Higher Coverage
- Good resistance to heat

Direction For Use

- It can be applied by brush, roller, spreader or fingers.
- Clean both the surfaces to be bonded.
- Apply a thin coat of the adhesive on single or both the surfaces as per requirement.
- Press both the surfaces and keep them under pressure till the adhesives dry completely.
- Wipe out the excess adhesive pressed outside with a WET CLOTH.

Pack Size

- 5kgs, 25kgs, 50 kgs

The description, detail, and data contained herein are presented for your guidance only. Because there are many factors beyond our control which may affect processing or application, it is the user's responsibility to determine the suitability of the product for his intended use. No statement or information contained herein is to be considered as a warranty.

Caution:

- Keep away from the reach of children.
- Do not use empty this to store any food items.

speb 7 ADHESIVE

Synthetic Resin WoodWorking Adhesive



speb 7®
ADHESIVE

HEAT-FIX ADHESIVE

Application Industries

- Plywood to Laminates
- MDF/HDF to Laminate
- For making furniture
- And other industrial applications

Directions For Use

- Apply HEAT- FIX ADHESIVE on both the surfaces evenly
- Allow the adhesive to dry for 3–5 minutes or 'TOUCH TO DRY" before uniting the surfaces.
- Press well on critical areas with wooden plank.
- Ensure minimum gaps between the laminates.

Product Highlights

- SPEB 7 HEAT- FIX ADHESIVE is a new technology HIGH HEAT RESISTANCE SYNTHETIC RUBBER ADHESIVE.
- The Adhesive has been formulated to withstand heat resistance up to 170° Celcius.

Pack Size

- 200 ml, 500 ml, 1 Ltr, 5 Ltr



The description, detail, and data contained herein are presented for your guidance only. Because there are many factors beyond our control which may affect processing or application, it is the user's responsibility to determine the suitability of the product for his intended use. No statement or information contained herein is to be considered as a warranty.

Caution:

- It is Highly Inflammable so keep away from heat & flame.
- Ensure children don't reach the product.

speb 7 ADHESIVE

SPEB-7 PREMIUM SR-911

Application Industries

- Laminate to Wood/Plywood bonding
- Carpet Industry
- Footwear Industry
- Automobile Industry
- Exhibition stand building

Directions For Use

- Ensure that the surface to be bonded is clean and dry.
- Clean the surface thoroughly to remove any dirt, grease etc.
- Apply the adhesive on both surfaces evenly and allow drying for 5–10 mins or until just "dry to touch".
- Now join both surfaces and press well for about 6–8 hours to get a strong and perfect bond.
- Care should be taken to avoid trapping of air during joining.

Product Highlights

- Excellent bond strength
- Better productivity
- High coverage
- Benzene free
- Keeps you & your industry safe

Pack Size

- 5 Ltr, 30 Ltr



Caution:

- It's Highly Inflammable, so keep away from heat & flame.
- Keep away from the reach of children.
- Do not use empty this to store any food items.

speb 7 ADHESIVE

SPEB-7 BOND-1

Application Industries

- Upholstery, Foam &Rexine
- Furniture, Flooring (Carpet/Vinyl/PVC)
- Other Industrial Applications

Directions For Use

- Stir well before use.
- Apply Bond No.1 Adhesive on one or both the surfaces evenly & allow it to dry for 2–5 mins.
- Bond No.1 Adhesive is fast bond adhesive.
- Press the surface well after application to get the perfect bond.
- When not in use keep it in tub with lid tightly closed.

Product Highlights

- BrushableAdhesive with good productivity & superior coverage.
- Very Fast Bonding & Good Initial Grab.
- Excellent Bonding Strength.
- Heat Resistance.
- Very Low Smell.
- Bond No.1 has High Initial Grab as well as high open time.

Pack Size

- 500 ml, 1 Ltr, 5 Ltr, 30 Ltr



Caution:

- It's Highly Inflammable, so keep away from heat & flame.
- Keep away from the reach of children.
- Do not use empty this to store any food items.

speb 7®
ADHESIVE
BORN FOR BONDING

ADHESIVE FOR FLOORING & WALLPAPER INDUSTRY

speb 7 ADHESIVE

SPEB-7 FLOORBOND SR

Application Industries

- Vinyl Flooring Roll & Tiles
- Laminate Flooring
- Carpet Flooring Roll & Tiles
- Rubber Flooring
- Cork Flooring
- Hardwood Flooring
- Sports Flooring
- Artificial Grass

Directions For Use

- Stir well before USE.
- Apply Adhesive on both the surfaces evenly.
- Allow the adhesive to dry for 5–7 minutes or "TOUCH TO DRY" before uniting the surfaces.
- Press well on critical areas like corners, bends etc to get a perfect bond.
- When not in use keep the lid tightly closed.

Product Highlights

- Higher Coverage.
- Flexible Open Time
- Lower Smell.
- Perfect Superior Bond Strength.
- Specially Designed Product for Flooring Industry.

Pack Size

- 1 Ltr, 5 ltr



Caution:

- It's Highly Inflammable so keep away from heat & flame.
- Keep away from the reach of children.
- Do not use empty this to store any food items.

speb 7 ADHESIVE

SPEB-7 FLOORBOND Waterbased

Application Industries

- PVC/Vinyl Flooring & Tiles
- Heterogeneous PVC
- Expanded Vinyl, Semi Flexible Floor Tiles
- Concrete, Sand/ Cement Screeds, or Epoxy
- Smoothed Sub-Floors, Subfloors composed of Wooden materials, Plywood, Chipboard & hardwood

Directions For Use

- Before application, be sure that joint surfaces are clean, smooth, dry and free of all contaminations.
- If necessary, substrate should be consolidated with screed before repairs and should be applied primer in order to reduce consumption and obtain a homogenously balanced absorptive surface.
- Pour the adhesive on the floor and apply with a notch trowel in one smooth layer on the whole application area. Place and fix the floor covering material on the surface after 5–10 minutes.
- Place the flooring materials while the adhesive is wet and capable of holding the material.

Product Highlights

- VOC Compliant
- ODOUR Free
- NON Toxic
- NON Flammable
- SINGLE SIDE Application
- NON Ventilated Rooms

Pack Size

- 5 Kg, 15 Kg



Caution:

- Keep away from the reach of children.
- Do not use empty this to store any food items.

speb 7 ADHESIVE

SPEB-7 BOND-1

Application Industries

- Upholstery, Foam &Rexine
- Furniture, Flooring (Carpet/Vinyl/PVC)
- Other Industrial Applications

Directions For Use

- Stir well before use.
- Apply Bond No.1 Adhesive on one or both the surfaces evenly & allow it to dry for 2–5 mins.
- Bond No.1 Adhesive is fast bond adhesive.
- Press the surface well after application to get the perfect bond.
- When not in use keep it in tub with lid tightly closed.

Product Highlights

- BrushableAdhesive with good productivity & superior coverage.
- Very Fast Bonding & Good Initial Grab.
- Excellent Bonding Strength.
- Heat Resistance.
- Very Low Smell.
- Bond No.1 has High Initial Grab as well as high open time.

Pack Size

- 500 ml, 1 Ltr, 5 Ltr, 30 Ltr



Caution:

- It's Highly Inflammable, so keep away from heat & flame.
- Keep away from the reach of children.
- Do not use empty this to store any food items.

speb 7 ADHESIVE

SPEB-7 WALLFIX

Application Industries

- All types of wallpapers
- Vinyl, Paper & Fabric backed
- Textile backed
- Polystyrene coverings

Directions For Use

- Before application, be sure that joint surfaces are clean, smooth, dry and free of all contaminations.
- Pour the adhesive on the wall and apply with a notch trowel or spatula in one smooth layer on the whole application area.
- Place and fix the wallpaper on the surface after 5-10 minutes.
- Place the wallpaper while the adhesive is wet and capable of holding the material.

Product Highlights

- Water based Wallpaper Adhesive for internal use.
- Good Coverage
- Single Side Application
- ODOUR Free, NON Toxic
- NON Flammable & VOC Compliant

Pack Size

- 5 kg



Caution:

- Keep away from the reach of children.
- Do not use empty this to store any food items.

speb 7®
ADHESIVE
BORN FOR BONDING

ADHESIVE FOR HVAC INDUSTRY

speb 7® ADHESIVE

DUCT-FIX ADHESIVE

Application Industries

- **AC Ductin/Chilled Water Piping/Air Ventilation System**
  Fabrication of AC ducts - To bond Nitrile Rubber, Cross linked Polyethylene, Glass Wool/Rock Wool to Duct surface
- Chilled Water piping - To bond Nitrile Rubber, Cross linked Polyethylene, Glass Wool/Rock Wool to MS pipe lines
- Acoustic Insulation - To Bond Nitrile Rubber to Concrete walls, Vertical surfaces & Duct lining with Nitrile rubber
- Wall Paneling for cold storages - To bond Nitrile Rubber, Cross linked Polyethylene, Glass Wool/Rock Wool to smooth Concrete wall surface
- Under deck/Over deck Insulation - To bond Nitrile Rubber, Cross linked Polyethylene, Glass Wool/Rock
- Wool to smooth Concrete wall surface
  (mechanical fasteners are recommended for under deck insulation)

Directions For Use

- Clean the substrates to be bonded so that they free from Dust/Rust/oil etc.
- Stir the adhesive well before use. Apply SPEB-7 ADHESIVE on both the substrates uniformly by spreader/ Brush, First on Non-porous substrate & then on Porous substrates.
- Allow it to dry for 2-5 minutes or till the adhesive becomes touch to dry.
- Then press both the substrates together ensuring uniform contact so that air pockets are not formed.
- Cure for 24 hrs at Room Temperature.

Product Highlights

- Helps you achieve a workable strength in 5 to 7 minutes
- Higher coverage
- Bonding that is unbreakable
- Very low smell

Pack Size

- 5 Ltr & 30 Ltr

Caution : It is Highly Inflammable so keep away from heat & flame. Ensure children don't reach the product.



Application Industries

SPEB-7 DUCTFIX-ECO ADHEISVE

is a specially formulated adhesive used by HVAC Contractors.DUCTFIX It is also used for to bonding various insulation substrates like Nitrile Rubber / XPE foam / Glass wool to Galvanized Iron sheet / Aluminum Sheet etc. to provide Insulation to AC Ducts, Chilled Water Pipe Lines, and Reaction Vessels in various Industrial & Residential Projects.

This superior adhesive is a new technology adhesive which is close to ZERO SMELL during application , lower viscosity which will give higher coverage, superior bond strength as the solid content is almost double than the regular traditional adhesive and most important –it has an unique property of IMMEDIATE BOND as well as HIGHER OPEN TIME i.e you can either bond both the surface immediately after application or give an open time from 0-60 mins whatever to suite you operational setup.

Directions For Use

- Stir well before use
- Apply DUCTFIX-ECO Adhesives on Both the surfaces evenly
- Press the surfaces well after application to get the perfect bond
- When not in use keep it in tin with lid tightly closed

Product Highlights

- Brush Adhesive ensures higher productivity
- Flexible bond time to suite you application
- Excellent Bonding Strength
- Very low smell

Pack Size

- 5 Ltr, 30 Ltr

Caution

- HIGHLY INFLAMMABLE
- Keep away from Heat & Flame
- Keep away from reach of children
- Do not use empty tins to Store any Food Item

speb 7 ADHESIVE

DUCT-FIX ECO



Application Industries

- Laminate to Wood/Plywood bonding
- Carpet Industry
- Footwear Industry
- Automobile Industry
- Exhibition stand building

Directions For Use

- Ensure that the surface to be bonded is clean and dry.
- Clean the surface thoroughly to remove any dirt, grease etc.
- Apply the adhesive on both surfaces evenly and allow drying for 5–10 mins or until just "dry to touch".
- Now join both surfaces and press well for about 6–8 hours to get a strong and perfect bond.
- Care should be taken to avoid trapping of air during joining.

Product Highlights

- Excellent bond strength
- Better productivity
- High coverage
- Benzene free
- Keeps you & your industry safe

Pack Size

- 5 Ltr, 30 Ltr

Caution:

- It's Highly Inflammable, so keep away from heat & flame.
- Keep away from the reach of children.
- Do not use empty this to store any food items.


speb 7® ADHESIVE

SPEB-7 PREMIUM SR-911



speb 7®
ADHESIVE
BORN FOR BONDING

ADHESIVE FOR HARDWARE INDUSTRY

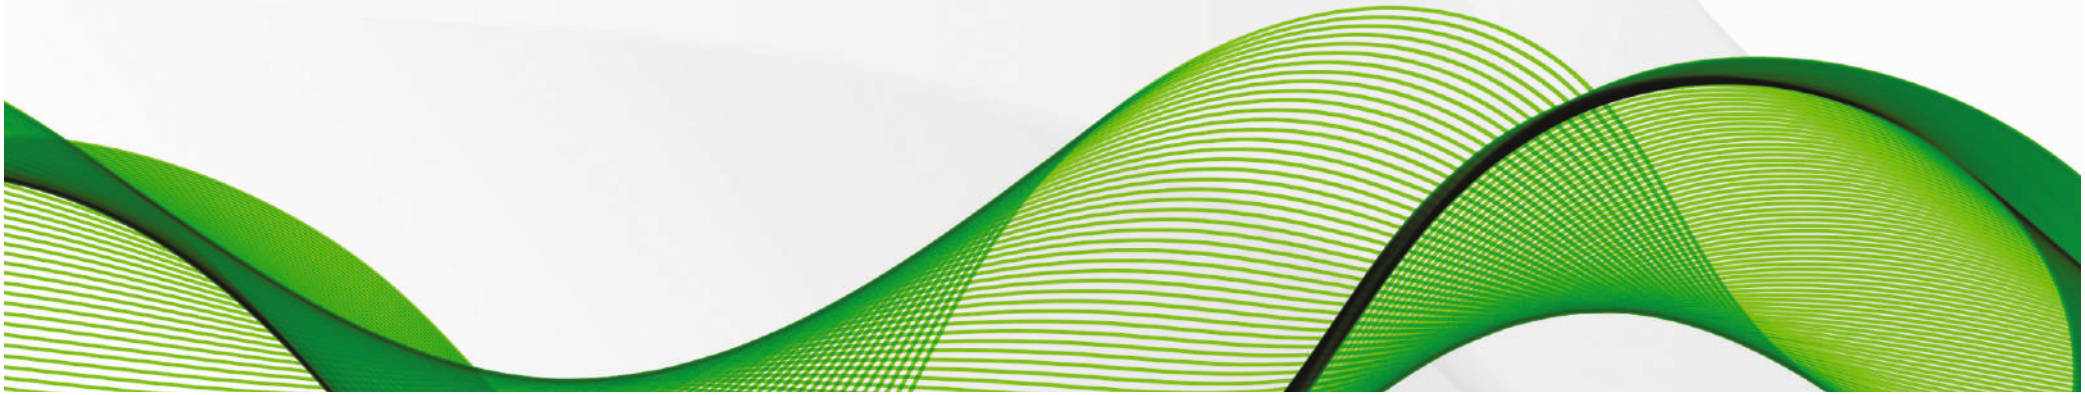

speb 7 ADHESIVE

Multi-Fix

Application Industries

- SPEB-7 Multi-Fix is a synthetic rubber based adhesive. It's a multipurpose adhesive used for repair work at homes/offices/Industries.
    - Major applications:
    - Foam – Almost Everything
    - Leather – Almost everything
    - Rexin – Almost Everything etc.

Method of Use

- Clean the surface thoroughly to remove any dirt, grease etc.
- Apply the adhesive on both surfaces evenly and allow drying for 5-10 minutes or until just "dry to touch".
- Join both surfaces and press well.
- Leave it for about 1-2 hours to get a strong and perfect bond.

Pack Size

- 10 ml, 20 ml, 40 ml

Caution

- Highly Inflammable.
- Keep away from heat and flame.
- Replace cap Immediately after use.
- Keep Away from Reach of Children.
- DO NOT INHALE



speb 7®
ADHESIVE

SPEB-7 Multipurpose Adhesive

Application Industries

- Upholstery (CHAIR / SOFA Manufacturing)
- Bus Body (Vinyl to Plywood / Hat-Rack / other areas)
- PVC Flooring & Carpet Flooring
- Automobile Industry
- Ducting & Insulation
- Refrigeration Industry
- Switchgear Industry
- Leather Works
- Domestic Application
- Handicraft Industry

Directions For Use

- Keep the surface to be bonded clean & dry.
- Remove any dirt, grease etc.
- Apply the adhesive on both surfaces equally and allow drying for 5-10 mins.
- Now join both surfaces and press well for about 4-8 hours to get a strong bond.
- Care should be taken to avoid touching of air during joining.

Product Highlights

- Multi-purpose adhesive.
- Ideal viscosity gives superior coverage.
- Excellent bonding strength.
- Does not contain benzene that reduces the risk of cancer.

Pack Size

- 50 ml, 100 ml, 200 ml, 500 ml, 1 ltr, 2 ltr, 4 ltr, 5 ltr, 30 ltr



Caution:

- It is Highly Inflammable so keep away from heat & flame.
- Ensure children don't reach the product.

speb 7 ADHESIVE

SPEB-7 BOND-1

Application Industries

- Upholstery, Foam &Rexine
- Furniture, Flooring (Carpet/Vinyl/PVC)
- Other Industrial Applications

Directions For Use

- Stir well before use.
- Apply Bond No.1 Adhesive on one or both the surfaces evenly & allow it to dry for 2–5 mins.
- Bond No.1 Adhesive is fast bond adhesive.
- Press the surface well after application to get the perfect bond.
- When not in use keep it in tub with lid tightly closed.

Product Highlights

- BrushableAdhesive with good productivity & superior coverage.
- Very Fast Bonding & Good Initial Grab.
- Excellent Bonding Strength.
- Heat Resistance.
- Very Low Smell.
- Bond No.1 has High Initial Grab as well as high open time.

Pack Size

- 500 ml, 1 Ltr, 5 Ltr, 30 Ltr



Caution:

- It's Highly Inflammable, so keep away from heat & flame.
- Keep away from the reach of children.
- Do not use empty this to store any food items.

speb 7®
ADHESIVE

HEAT-FIX ADHESIVE

Application Industries

- Plywood to Laminates
- MDF/HDF to Laminate
- For making furniture
- And other industrial applications

Directions For Use

- Apply HEAT- FIX ADHESIVE on both the surfaces evenly
- Allow the adhesive to dry for 3–5 minutes or 'TOUCH TO DRY" before uniting the surfaces.
- Press well on critical areas with wooden plank.
- Ensure minimum gaps between the laminates.

Product Highlights

- SPEB 7 HEAT- FIX ADHESIVE is a new technology HIGH HEAT RESISTANCE SYNTHETIC RUBBER ADHESIVE.
- The Adhesive has been formulated to withstand heat resistance up to 170° Celcius.

Pack Size

- 200 ml, 500 ml, 1 Ltr, 5 Ltr



The description, detail, and data contained herein are presented for your guidance only. Because there are many factors beyond our control which may affect processing or application, it is the user's responsibility to determine the suitability of the product for his intended use. No statement or information contained herein is to be considered as a warranty.

Caution:

- It is Highly Inflammable so keep away from heat & flame.
- Ensure children don't reach the product.

speb 7®
ADHESIVE

AQUA-7 WATERPROOF ADHESIVE

Application Industries

- SPEB-7 WOOD WORKING ADHESIVE – AQUA-7 D3 is a specially formulated adhesive used in WOODWORKING INDUSTRY.
- It is a WATERPROOF synthetic resin adhesive that protects furniture from de-bonding even when exposed to water.
- It can be applied for bonding of Wood, Plywood, Laminates, Veneers, Particle Board, MDF, Block Board/Hard Board to each other or to any two materials where at least one of them is porous.

Directions For Use

- The adhesive can be applied by brush, roller, spreader or fingers.
- Clean both the surfaces to be bonded.
- Apply a thin coat of AQUA-7 D3 adhesive on single or both the surfaces as per requirement.
- Press both the surfaces and keep them under pressure till the adhesives dry completely.
- Wipe out the excess adhesive pressed outside with a WET CLOTH.

Product Highlights

- Resistant to Water.
- Resistant to Heat (Upto 80 deg.C).
- Higher Initial Tack & Fast Drying.
- Thinner Bond Line.
- Better Flow.
- SUPER PERFECT EVERLASTING BOND.

Pack Size

- 800 gms, 5 Kg, 20 Kg

The description, detail, and data contained herein are presented for your guidance only. Because there are many factors beyond our control which may affect processing or application, it is the user's responsibility to determine the suitability of the product for his intended use. No statement or information contained herein is to be considered as a warranty.

Caution:

- Keep away from the reach of children.
- Do not use empty this to store any food items.



Application Industries

- SPEB-7 WOOD WORKING ADHESIVE is a synthetic resin adhesive. It strongly binds wood, laminate, plywood, MDF, Veneers and all types of boards and cork.
- This adhesive can be applied for bonding Wood, Plywood, Laminates, Veneers, Particle Board, MDF, and Block Board/Hard Board to each other or to any two materials where at least one of them is porous.

Product Highlights

- Excellent Bond Strength
- Higher Coverage
- Good resistance to heat

Direction For Use

- It can be applied by brush, roller, spreader or fingers.
- Clean both the surfaces to be bonded.
- Apply a thin coat of the adhesive on single or both the surfaces as per requirement.
- Press both the surfaces and keep them under pressure till the adhesives dry completely.
- Wipe out the excess adhesive pressed outside with a WET CLOTH.

Pack Size

- 5kgs, 25kgs, 50 kgs

The description, detail, and data contained herein are presented for your guidance only. Because there are many factors beyond our control which may affect processing or application, it is the user's responsibility to determine the suitability of the product for his intended use. No statement or information contained herein is to be considered as a warranty.

Caution:

- Keep away from the reach of children.
- Do not use empty this to store any food items.

speb 7 ADHESIVE

Synthetic Resin WoodWorking Adhesive



speb 7®
ADHESIVE
BORN FOR BONDING

ADHESIVE FOR GENSET INDUSTRY

speb 7 ADHESIVE

SPEB-7 GENFIX ADHESIVE

Application Industries

- SPEB-7 GENFIX ADHESIVE is a specially formulated adhesive used by SILENT DG SET manufacturers for bonding acoustic foam to panels in Generator Enclosure
- GENFIX finds an application to bond ACOUSTIC FOAM to PANEL . This superior adhesive is a new technology adhesive which is close to ZERO SMELL during application.
- It gives lower viscosity with higher coverage, high heat resistance, superior bond strength as the solid content is almost double than the regular traditional adhesive,
- Most important, it has an unique property of IMMEDIATE BOND as well as HIGHER OPEN TIME i.e you can either bond both the surface immediately after application or give an open time from 0-60 mins whatever to suit your operational setup.

Product Highlights

- Very low smell
- Gen-Fix Spray/Brush Adhesive ensures higher productivity
- High Heat Resistance
- Flexible bond time to suite you application
- Excellent Bonding Strength



Pack Size

- 30 Ltr

CAUTION

- Highly inflammable
- Keep away from Heat & Flame
- Keep away from reach of children
- Do not use empty tins to Store any Food Item

HOME INTERIOR ADHESIVES

speb 7 ADHESIVE



PROJECT ADHESIVES

speb 7 ADHESIVE

FLOORING Adhesives











Theaters / Auditorium



HVAC Adhesives



Home & Office Projects



INDUSTRIAL ADHESIVES

speb 7 ADHESIVE

AUTOMOBILE Adhesives






MATTRESS Adhesives



JOINERY Adhesives



SOFA & CHAIR Adhesives




Jewellery Box & Display Mannequin Adhesive




Railway/Metro Interiors Adhesives



Silent Genset Adhesives



Note:-There are Many More small scale industries were our adhesives are applied.